


UltraMarine


Flip Swivel

Selection table

side view

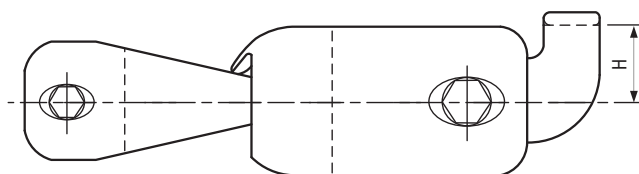

top view

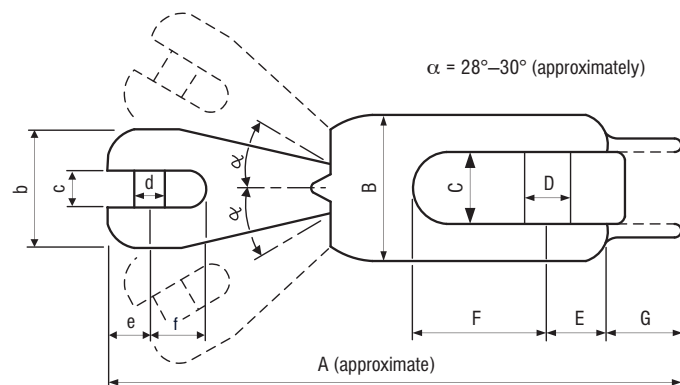

TYPE #	CHAIN DIAMETER		WHOLE LENGTH APPROXIMATELY A	chain part dimensions b×c×d×e×f	ANCHOR PART DIMENSIONS B×C×D×E×F	FLIPPING BRIDGE DIMENSIONS G×H	BREAKING LOAD (*)		MAXIMUM ANCHOR WEIGHT
	mm	inch	mm	mm	mm	mm	kN	lbf	kg
ufs 6–12	6	1/4"	121	25×7,6×7×9×11	35×16×11×13×31	14×17	38,4	8640	12
ufs 8–21	6	1/4"	147,5	30×9,4×9×11×14,5	40×19×13×16×36,5	18,5×20	56,7	12740	21
	8	5/16"							
ufs 10–35	8	5/16"	168	35×11,6×11×13×17	45×21×14,5×18×40	21×22,5	90,7	20400	35
	10	3/8"							
ufs 13–60	10	3/8"	211,5	45×15,2×14,5×16,5×23	55×26×18×23×51,5	26,5×30	160,9	36200	60
	12	1/2"							
ufs 16–100	13	1/2"	250	53×18,2×18×20×27	65×30,6×22×27×59	33×36	236,5	53200	100
	14	5/8"							
	16	5/8"							
	18	3/4"							
ufs 20–160	20	3/4"	309	65×23×22×26×34	—×38×26×32×72	40×40,5	321,5	72300	160
	22	7/8"							
ufs 26–250	26	1"	364	—×30×26×33×43	—×48×32×40×77	48×56	474,8	106700	250
	28	1 1/8"							
	30	1 1/4"							
ufs 34–360	34	1 5/16"	—	—	—	—	~800	~180000	360
	36	1 3/8"							
	38	1 1/2"							

(*) – Tested by RINA (except UFS 34–360).

– Safe Working Load = 0,5 × Breaking Load.

– One size bigger UFS can also be used with the same chain. Therefore one size bigger swivel should be selected for chains such as Grade 70 (G7).

– UFS selection should be based on the “Max. Anchor Weight”. If the “Max. Anchor Weight” is not enough, one size bigger UFS should be selected.

– Custom ones without the flipping bridge and flipping nub could also be made for symmetrical stockless anchors.